


O-Ring Japanese Standard JIS Sizes

Standard Japanese O-Rings Sizes. Tolerances vary by use, please see our tolerance pages. Thousands of non-standard Size: JIS2401s are available in stock or can be made within a few weeks typically without tooling fees so no need to settle for a less than optimal fit.

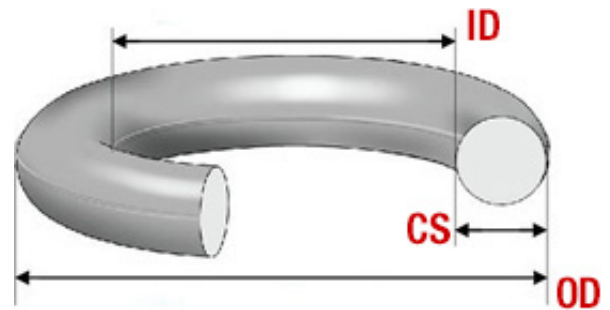

Size: JIS2401	C.S. Inch	I.D. Inch	O.D. Inch	C.S. MM	I.D. MM	O.D. MM	Size: JIS2401
G25	0.122	0.961	1.205	3.10	24.40	30.60	G25
G30	0.122	1.157	1.401	3.10	29.40	35.60	G30
G35	0.122	1.354	1.598	3.10	34.40	40.60	G35
G40	0.122	1.551	1.795	3.10	39.40	45.60	G40
G45	0.122	1.748	1.992	3.10	44.40	50.60	G45
G50	0.122	1.945	2.189	3.10	49.40	55.60	G50
G55	0.122	2.142	2.386	3.10	54.40	60.60	G55
G60	0.122	2.339	2.583	3.10	59.40	65.60	G60
G65	0.122	2.535	2.779	3.10	64.40	70.60	G65
G70	0.122	2.732	2.976	3.10	69.40	75.60	G70
G75	0.122	2.929	3.173	3.10	74.40	80.60	G75
G80	0.122	3.126	3.370	3.10	79.40	85.60	G80
G85	0.122	3.323	3.567	3.10	84.40	90.60	G85
G90	0.122	3.520	3.764	3.10	89.40	95.60	G90
G95	0.122	3.717	3.961	3.10	94.40	100.60	G95
G100	0.122	3.913	4.157	3.10	99.40	105.60	G100
G105	0.122	4.110	4.354	3.10	104.40	110.60	G105
G110	0.122	4.307	4.551	3.10	109.40	115.60	G110
G115	0.122	4.504	4.748	3.10	114.40	120.60	G115
G120	0.122	4.701	4.945	3.10	119.40	125.60	G120
G125	0.122	4.898	5.142	3.10	124.40	130.60	G125
G130	0.122	5.094	5.338	3.10	129.40	135.60	G130
G135	0.122	5.291	5.535	3.10	134.40	140.60	G135
G140	0.122	5.488	5.732	3.10	139.40	145.60	G140
G145	0.122	5.685	5.929	3.10	144.40	150.60	G145
G150	0.224	5.878	6.326	5.70	149.30	160.70	G150
G155	0.224	6.075	6.523	5.70	154.30	165.70	G155
G160	0.224	6.272	6.720	5.70	159.30	170.70	G160
G165	0.224	6.469	6.917	5.70	164.30	175.70	G165

O-Ring Japanese Standard JIS Sizes

Size: JIS2401	C.S. Inch	I.D. Inch	O.D. Inch	C.S. MM	I.D. MM	O.D. MM	Size: JIS2401
G170	0.224	6.665	7.113	5.70	169.30	180.70	G170
G175	0.224	6.862	7.310	5.70	174.30	185.70	G175
G180	0.224	7.059	7.507	5.70	179.30	190.70	G180
G185	0.224	7.256	7.704	5.70	184.30	195.70	G185
G190	0.224	7.453	7.901	5.70	189.30	200.70	G190
G195	0.224	7.650	8.098	5.70	194.30	205.70	G195
G200	0.224	7.846	8.294	5.70	199.30	210.70	G200
G210	0.224	8.240	8.688	5.70	209.30	220.70	G210
G220	0.224	8.634	9.082	5.70	219.30	230.70	G220
G230	0.224	9.028	9.476	5.70	229.30	240.70	G230
G240	0.224	9.421	9.869	5.70	239.30	250.70	G240
G250	0.224	9.815	10.263	5.70	249.30	260.70	G250
G255	0.224	10.012	10.460	5.70	254.30	265.70	G255
G260	0.224	10.209	10.657	5.70	259.30	270.70	G260
G270	0.224	10.602	11.050	5.70	269.30	280.70	G270
G280	0.224	10.996	11.444	5.70	279.30	290.70	G280
G290	0.224	11.390	11.838	5.70	289.30	300.70	G290
G300	0.224	11.783	12.231	5.70	299.30	310.70	G300
G305	0.224	11.980	12.428	5.70	304.30	315.70	G305
G310	0.224	12.177	12.625	5.70	309.30	320.70	G310
G315	0.224	12.374	12.822	5.70	314.30	325.70	G315
G320	0.224	12.571	13.019	5.70	319.30	330.70	G320
G325	0.224	12.768	13.216	5.70	324.30	335.70	G325
G330	0.224	12.965	13.413	5.70	329.30	340.70	G330
G335	0.224	13.161	13.609	5.70	334.30	345.70	G335
G340	0.224	13.358	13.806	5.70	339.30	350.70	G340
G345	0.224	13.555	14.003	5.70	344.30	355.70	G345
G350	0.224	13.752	14.200	5.70	349.30	360.70	G350
G355	0.224	13.949	14.397	5.70	354.30	365.70	G355
G360	0.224	14.146	14.594	5.70	359.30	370.70	G360
G365	0.224	14.342	14.790	5.70	364.30	375.70	G365
G370	0.224	14.539	14.987	5.70	369.30	380.70	G370
G375	0.224	14.736	15.184	5.70	374.30	385.70	G375
G380	0.224	14.933	15.381	5.70	379.30	390.70	G380
G385	0.224	15.130	15.578	5.70	384.30	395.70	G385
G390	0.224	15.327	15.775	5.70	389.30	400.70	G390

O-Ring Japanese Standard JIS Sizes

Size: JIS2401	C.S. Inch	I.D. Inch	O.D. Inch	C.S. MM	I.D. MM	O.D. MM	Size: JIS2401
G395	0.224	15.524	15.972	5.70	394.30	405.70	G395
G400	0.224	15.720	16.168	5.70	399.30	410.70	G400
G405	0.224	15.917	16.365	5.70	404.30	415.70	G405
G410	0.224	16.114	16.562	5.70	409.30	420.70	G410
G415	0.224	16.311	16.759	5.70	414.30	425.70	G415
G420	0.224	16.508	16.956	5.70	419.30	430.70	G420
G425	0.224	16.705	17.153	5.70	424.30	435.70	G425
G430	0.224	16.902	17.350	5.70	429.30	440.70	G430
G435	0.224	17.098	17.546	5.70	434.30	445.70	G435
G440	0.224	17.295	17.743	5.70	439.30	450.70	G440
G445	0.224	17.492	17.940	5.70	444.30	455.70	G445
G450	0.224	17.689	18.137	5.70	449.30	460.70	G450
G455	0.224	17.886	18.334	5.70	454.30	465.70	G455
G460	0.224	18.083	18.531	5.70	459.30	470.70	G460
G465	0.224	18.279	18.727	5.70	464.30	475.70	G465
G470	0.224	18.476	18.924	5.70	469.30	480.70	G470
G475	0.224	18.673	19.121	5.70	474.30	485.70	G475
G480	0.224	18.870	19.318	5.70	479.30	490.70	G480
G485	0.224	19.067	19.515	5.70	484.30	495.70	G485
G490	0.224	19.264	19.712	5.70	489.30	500.70	G490
G495	0.224	19.461	19.909	5.70	494.30	505.70	G495
G500	0.224	19.657	20.105	5.70	499.30	510.70	G500
G510	0.224	20.051	20.499	5.70	509.30	520.70	G510
G520	0.224	20.445	20.893	5.70	519.30	530.70	G520
G530	0.224	20.839	21.287	5.70	529.30	540.70	G530
G540	0.224	21.232	21.680	5.70	539.30	550.70	G540
G550	0.224	21.626	22.074	5.70	549.30	560.70	G550
G560	0.224	22.020	22.468	5.70	559.30	570.70	G560
G570	0.224	22.413	22.861	5.70	569.30	580.70	G570
G580	0.224	22.807	23.255	5.70	579.30	590.70	G580
G590	0.224	23.201	23.649	5.70	589.30	600.70	G590
G600	0.224	23.594	24.042	5.70	599.30	610.70	G600
G605	0.224	23.791	24.239	5.70	604.30	615.70	G605
G860	0.224	33.831	34.279	5.70	859.30	870.70	G860
G910	0.224	35.799	36.247	5.70	909.30	920.70	G910

O-Ring Japanese Standard JIS Sizes

Size: JIS2401	C.S. Inch	I.D. Inch	O.D. Inch	C.S. MM	I.D. MM	O.D. MM	Size: JIS2401
GM005	0.197	0.197	0.591	5.00	5.00	15.00	GM005
GM010	0.197	0.394	0.788	5.00	10.00	20.00	GM010
GM015	0.197	0.591	0.985	5.00	15.00	25.00	GM015
GM020	0.197	0.787	1.181	5.00	20.00	30.00	GM020
GM025	0.197	0.984	1.378	5.00	25.00	35.00	GM025
GM030	0.197	1.181	1.575	5.00	30.00	40.00	GM030
GM035	0.197	1.378	1.772	5.00	35.00	45.00	GM035
GM040	0.197	1.575	1.969	5.00	40.00	50.00	GM040
GM045	0.197	1.772	2.166	5.00	45.00	55.00	GM045
GM050	0.197	1.969	2.363	5.00	50.00	60.00	GM050
GM055	0.197	2.165	2.559	5.00	55.00	65.00	GM055
GM060	0.197	2.362	2.756	5.00	60.00	70.00	GM060
GM065	0.197	2.559	2.953	5.00	65.00	75.00	GM065
GM070	0.197	2.756	3.150	5.00	70.00	80.00	GM070
GM075	0.197	2.953	3.347	5.00	75.00	85.00	GM075
GM080	0.197	3.150	3.544	5.00	80.00	90.00	GM080
GM085	0.197	3.346	3.740	5.00	85.00	95.00	GM085
GM090	0.197	3.543	3.937	5.00	90.00	100.00	GM090
GM095	0.197	3.740	4.134	5.00	95.00	105.00	GM095
GM100	0.197	3.937	4.331	5.00	100.00	110.00	GM100
GM105	0.197	4.134	4.528	5.00	105.00	115.00	GM105
GM110	0.197	4.331	4.725	5.00	110.00	120.00	GM110
GM115	0.197	4.528	4.922	5.00	115.00	125.00	GM115
GM120	0.197	4.724	5.118	5.00	120.00	130.00	GM120
GM125	0.197	4.921	5.315	5.00	125.00	135.00	GM125
GM130	0.197	5.118	5.512	5.00	130.00	140.00	GM130
GM135	0.197	5.315	5.709	5.00	135.00	145.00	GM135
GM140	0.197	5.512	5.906	5.00	140.00	150.00	GM140
GM145	0.197	5.709	6.103	5.00	145.00	155.00	GM145
GM150	0.197	5.906	6.300	5.00	150.00	160.00	GM150
GM155	0.197	6.102	6.496	5.00	155.00	165.00	GM155
GM160	0.197	6.299	6.693	5.00	160.00	170.00	GM160
GM165	0.197	6.496	6.890	5.00	165.00	175.00	GM165
GM170	0.197	6.693	7.087	5.00	170.00	180.00	GM170
GM175	0.197	6.890	7.284	5.00	175.00	185.00	GM175

O-Ring Japanese Standard JIS Sizes

Size: JIS2401	C.S. Inch	I.D. Inch	O.D. Inch	C.S. MM	I.D. MM	O.D. MM	Size: JIS2401
GM180	0.197	7.087	7.481	5.00	180.00	190.00	GM180
GM185	0.197	7.283	7.677	5.00	185.00	195.00	GM185
GM190	0.197	7.480	7.874	5.00	190.00	200.00	GM190
GM195	0.197	7.677	8.071	5.00	195.00	205.00	GM195
GM200	0.197	7.874	8.268	5.00	200.00	210.00	GM200
GM205	0.197	8.071	8.465	5.00	205.00	215.00	GM205
GM210	0.197	8.268	8.662	5.00	210.00	220.00	GM210
GM215	0.197	8.465	8.859	5.00	215.00	225.00	GM215
GM220	0.197	8.661	9.055	5.00	220.00	230.00	GM220
GM225	0.197	8.858	9.252	5.00	225.00	235.00	GM225
GM230	0.197	9.055	9.449	5.00	230.00	240.00	GM230
GM235	0.197	9.252	9.646	5.00	235.00	245.00	GM235
GM240	0.197	9.449	9.843	5.00	240.00	250.00	GM240
GM245	0.197	9.646	10.040	5.00	245.00	255.00	GM245
GM250	0.197	9.843	10.237	5.00	250.00	260.00	GM250
GM255	0.197	10.039	10.433	5.00	255.00	265.00	GM255
GM260	0.197	10.236	10.630	5.00	260.00	270.00	GM260
GM265	0.197	10.433	10.827	5.00	265.00	275.00	GM265
GM270	0.197	10.630	11.024	5.00	270.00	280.00	GM270
GM275	0.197	10.827	11.221	5.00	275.00	285.00	GM275
GM280	0.197	11.024	11.418	5.00	280.00	290.00	GM280
GM285	0.197	11.220	11.614	5.00	285.00	295.00	GM285
GM290	0.197	11.417	11.811	5.00	290.00	300.00	GM290
GM295	0.197	11.614	12.008	5.00	295.00	305.00	GM295
GM300	0.197	11.811	12.205	5.00	300.00	310.00	GM300
GS150	1.220	5.878	6.122	3.10	149.30	155.50	GS150
GS155	1.220	6.075	6.319	3.10	154.30	160.50	GS155
GS160	1.220	6.272	6.516	3.10	159.30	165.50	GS160
GS165	1.220	6.468	6.712	3.10	164.30	170.50	GS165
GS170	1.220	6.665	6.909	3.10	169.30	175.50	GS170
GS175	1.220	6.862	7.106	3.10	174.30	180.50	GS175
GS180	1.220	7.059	7.303	3.10	179.30	185.50	GS180
GS185	1.220	7.256	7.500	3.10	184.30	190.50	GS185
GS190	1.220	7.453	7.697	3.10	189.30	195.50	GS190
GS195	1.220	7.650	7.894	3.10	194.30	200.50	GS195
GS200	1.220	7.846	8.090	3.10	199.30	205.50	GS200

O-Ring Japanese Standard JIS Sizes

Size: JIS2401	C.S. Inch	I.D. Inch	O.D. Inch	C.S. MM	I.D. MM	O.D. MM	Size: JIS2401
GS205	1.220	8.043	8.287	3.10	204.30	210.50	GS205
GS210	1.220	8.240	8.484	3.10	209.30	215.50	GS210
GS215	1.220	8.437	8.681	3.10	214.30	220.50	GS215
GS220	1.220	8.634	8.878	3.10	219.30	225.50	GS220
GS225	1.220	8.831	9.075	3.10	224.30	230.50	GS225
GS230	1.220	9.028	9.272	3.10	229.30	235.50	GS230
GS235	1.220	9.224	9.468	3.10	234.30	240.50	GS235
GS240	1.220	9.421	9.665	3.10	239.30	245.50	GS240
GS245	1.220	9.618	9.862	3.10	244.30	250.50	GS245
GS250	1.220	9.815	10.059	3.10	249.30	255.50	GS250
GS255	1.220	10.012	10.256	3.10	254.30	260.50	GS255
GS260	1.220	10.209	10.453	3.10	259.30	265.50	GS260
GS265	1.220	10.405	10.649	3.10	264.30	270.50	GS265
GS270	1.220	10.602	10.846	3.10	269.30	275.50	GS270
GS275	1.220	10.799	11.043	3.10	274.30	280.50	GS275
GS280	1.220	10.996	11.240	3.10	279.30	285.50	GS280
GS285	1.220	11.193	11.437	3.10	284.30	290.50	GS285
GS290	1.220	11.390	11.634	3.10	289.30	295.50	GS290
GS295	1.220	11.587	11.831	3.10	294.30	300.50	GS295
GS300	1.220	11.783	12.027	3.10	299.30	305.50	GS300
GS305	1.220	11.980	12.224	3.10	304.30	310.50	GS305
GS310	1.220	12.177	12.421	3.10	309.30	315.50	GS310
GS315	1.220	12.374	12.618	3.10	314.30	320.50	GS315
GS320	1.220	12.571	12.815	3.10	319.30	325.50	GS320
GS325	1.220	12.768	13.012	3.10	324.30	330.50	GS325
GS330	1.220	12.965	13.209	3.10	329.30	335.50	GS330
GS335	1.220	13.161	13.405	3.10	334.30	340.50	GS335
GS340	1.220	13.358	13.602	3.10	339.30	345.50	GS340
GS345	1.220	13.555	13.799	3.10	344.30	350.50	GS345
GS350	1.220	13.752	13.996	3.10	349.30	355.50	GS350
GS355	1.220	13.949	14.193	3.10	354.30	360.50	GS355
GS360	1.220	14.146	14.390	3.10	359.30	365.50	GS360
GS365	1.220	14.342	14.586	3.10	364.30	370.50	GS365
GS370	1.220	14.539	14.783	3.10	369.30	375.50	GS370
GS375	1.220	14.736	14.980	3.10	374.30	380.50	GS375
GS380	1.220	14.933	15.177	3.10	379.30	385.50	GS380

O-Ring Japanese Standard JIS Sizes

Size: JIS2401	C.S. Inch	I.D. Inch	O.D. Inch	C.S. MM	I.D. MM	O.D. MM	Size: JIS2401
GS385	1.220	15.130	15.374	3.10	384.30	390.50	GS385
GS390	1.220	15.327	15.571	3.10	389.30	395.50	GS390
GS395	1.220	15.524	15.768	3.10	394.30	400.50	GS395
GS400	1.220	15.720	15.964	3.10	399.30	405.50	GS400
P3	0.075	0.110	0.260	1.90	2.80	6.60	P3
P4	0.075	0.150	0.300	1.90	3.80	7.60	P4
P5	0.075	0.189	0.339	1.90	4.80	8.60	P5
P6	0.075	0.228	0.378	1.90	5.80	9.60	P6
P7	0.075	0.268	0.418	1.90	6.80	10.60	P7
P8	0.075	0.307	0.457	1.90	7.80	11.60	P8
P9	0.075	0.346	0.496	1.90	8.80	12.60	P9
P10	0.075	0.386	0.536	1.90	9.80	13.60	P10
P10A	0.094	0.386	0.574	2.40	9.80	14.60	P10A
P11	0.094	0.425	0.613	2.40	10.80	15.60	P11
P11.2	0.094	0.433	0.621	2.40	11.00	15.80	P11.2
P12	0.094	0.465	0.653	2.40	11.80	16.60	P12
P12.5	0.094	0.484	0.672	2.40	12.30	17.10	P12.5
P14	0.094	0.543	0.731	2.40	13.80	18.60	P14
P15	0.094	0.583	0.771	2.40	14.80	19.60	P15
P16	0.094	0.622	0.810	2.40	15.80	20.60	P16
P18	0.094	0.701	0.889	2.40	17.80	22.60	P18
P20	0.094	0.780	0.968	2.40	19.80	24.60	P20
P21	0.094	0.819	1.007	2.40	20.80	25.60	P21
P22	0.094	0.858	1.046	2.40	21.80	26.60	P22
P22.4	0.138	0.870	1.146	3.50	22.10	29.10	P22.4
P22A	0.138	0.854	1.130	3.50	21.70	28.70	P22A
P24	0.138	0.933	1.209	3.50	23.70	30.70	P24
P25	0.138	0.972	1.248	3.50	24.70	31.70	P25
P25.5	0.138	0.992	1.268	3.50	25.20	32.20	P25.5
P26	0.138	1.012	1.288	3.50	25.70	32.70	P26
P28	0.138	1.091	1.367	3.50	27.70	34.70	P28
P29	0.138	1.130	1.406	3.50	28.70	35.70	P29
P29.5	0.138	1.150	1.426	3.50	29.20	36.20	P29.5
P30	0.138	1.169	1.445	3.50	29.70	36.70	P30
P31	0.138	1.209	1.485	3.50	30.70	37.70	P31
P31.5	0.138	1.228	1.504	3.50	31.20	38.20	P31.5

O-Ring Japanese Standard JIS Sizes

Size: JIS2401	C.S. Inch	I.D. Inch	O.D. Inch	C.S. MM	I.D. MM	O.D. MM	Size: JIS2401
P32	0.138	1.248	1.524	3.50	31.70	38.70	P32
P34	0.138	1.327	1.603	3.50	33.70	40.70	P34
P35	0.138	1.366	1.642	3.50	34.70	41.70	P35
P35.5	0.138	1.386	1.662	3.50	35.20	42.20	P35.5
P36	0.138	1.406	1.682	3.50	35.70	42.70	P36
P38	0.138	1.484	1.760	3.50	37.70	44.70	P38
P39	0.138	1.524	1.800	3.50	38.70	45.70	P39
P40	0.138	1.563	1.839	3.50	39.70	46.70	P40
P41	0.138	1.602	1.878	3.50	40.70	47.70	P41
P42	0.138	1.642	1.918	3.50	41.70	48.70	P42
P44	0.138	1.720	1.996	3.50	43.70	50.70	P44
P45	0.138	1.760	2.036	3.50	44.70	51.70	P45
P46	0.138	1.799	2.075	3.50	45.70	52.70	P46
P48	0.138	1.878	2.154	3.50	47.70	54.70	P48
P48A	0.224	1.874	2.322	5.70	47.60	59.00	P48A
P49	0.138	1.917	2.193	3.50	48.70	55.70	P49
P50	0.138	1.957	2.233	3.50	49.70	56.70	P50
P50A	0.224	1.953	2.401	5.70	49.60	61.00	P50A
P52	0.224	2.031	2.479	5.70	51.60	63.00	P52
P53	0.224	2.071	2.519	5.70	52.60	64.00	P53
P55	0.224	2.150	2.598	5.70	54.60	66.00	P55
P56	0.224	2.189	2.637	5.70	55.60	67.00	P56
P58	0.224	2.268	2.716	5.70	57.60	69.00	P58
P60	0.224	2.346	2.794	5.70	59.60	71.00	P60
P62	0.224	2.425	2.873	5.70	61.60	73.00	P62
P63	0.224	2.465	2.913	5.70	62.60	74.00	P63
P65	0.224	2.543	2.991	5.70	64.60	76.00	P65
P67	0.224	2.622	3.070	5.70	66.60	78.00	P67
P70	0.224	2.740	3.188	5.70	69.60	81.00	P70
P71	0.224	2.780	3.228	5.70	70.60	82.00	P71
P75	0.224	2.937	3.385	5.70	74.60	86.00	P75
P80	0.224	3.134	3.582	5.70	79.60	91.00	P80
P85	0.224	3.331	3.779	5.70	84.60	96.00	P85
P90	0.224	3.528	3.976	5.70	89.60	101.00	P90
P95	0.224	3.724	4.172	5.70	94.60	106.00	P95
P100	0.224	3.921	4.369	5.70	99.60	111.00	P100

O-Ring Japanese Standard JIS Sizes

Size: JIS2401	C.S. Inch	I.D. Inch	O.D. Inch	C.S. MM	I.D. MM	O.D. MM	Size: JIS2401
P102	0.224	4.000	4.448	5.70	101.60	113.00	P102
P105	0.224	4.118	4.566	5.70	104.60	116.00	P105
P110	0.224	4.315	4.763	5.70	109.60	121.00	P110
P112	0.224	4.394	4.842	5.70	111.60	123.00	P112
P115	0.224	4.512	4.960	5.70	114.60	126.00	P115
P120	0.224	4.709	5.157	5.70	119.60	131.00	P120
P125	0.224	4.906	5.354	5.70	124.60	136.00	P125
P130	0.224	5.102	5.550	5.70	129.60	141.00	P130
P132	0.224	5.181	5.629	5.70	131.60	143.00	P132
P135	0.224	5.299	5.747	5.70	134.60	146.00	P135
P140	0.224	5.496	5.944	5.70	139.60	151.00	P140
P145	0.224	5.693	6.141	5.70	144.60	156.00	P145
P150	0.224	5.890	6.338	5.70	149.60	161.00	P150
P150A	0.331	5.886	6.548	8.40	149.50	166.30	P150A
P155	0.331	6.083	6.745	8.40	154.50	171.30	P155
P160	0.331	6.280	6.942	8.40	159.50	176.30	P160
P165	0.331	6.476	7.138	8.40	164.50	181.30	P165
P170	0.331	6.673	7.335	8.40	169.50	186.30	P170
P175	0.331	6.870	7.532	8.40	174.50	191.30	P175
P180	0.331	7.067	7.729	8.40	179.50	196.30	P180
P185	0.331	7.264	7.926	8.40	184.50	201.30	P185
P190	0.331	7.461	8.123	8.40	189.50	206.30	P190
P195	0.331	7.657	8.319	8.40	194.50	211.30	P195
P200	0.331	7.854	8.516	8.40	199.50	216.30	P200
P205	0.331	8.051	8.713	8.40	204.50	221.30	P205
P209	0.331	8.209	8.871	8.40	208.50	225.30	P209
P210	0.331	8.248	8.910	8.40	209.50	226.30	P210
P215	0.331	8.445	9.107	8.40	214.50	231.30	P215
P220	0.331	8.642	9.304	8.40	219.50	236.30	P220
P225	0.331	8.839	9.501	8.40	224.50	241.30	P225
P230	0.331	9.035	9.697	8.40	229.50	246.30	P230
P235	0.331	9.232	9.894	8.40	234.50	251.30	P235
P240	0.331	9.429	10.091	8.40	239.50	256.30	P240
P245	0.331	9.626	10.288	8.40	244.50	261.30	P245
P250	0.331	9.823	10.485	8.40	249.50	266.30	P250
P255	0.331	10.020	10.682	8.40	254.50	271.30	P255

O-Ring Japanese Standard JIS Sizes

Size: JIS2401	C.S. Inch	I.D. Inch	O.D. Inch	C.S. MM	I.D. MM	O.D. MM	Size: JIS2401
P260	0.331	10.217	10.879	8.40	259.50	276.30	P260
P265	0.331	10.413	11.075	8.40	264.50	281.30	P265
P270	0.331	10.610	11.272	8.40	269.50	286.30	P270
P275	0.331	10.807	11.469	8.40	274.50	291.30	P275
P280	0.331	11.004	11.666	8.40	279.50	296.30	P280
P285	0.331	11.201	11.863	8.40	284.50	301.30	P285
P290	0.331	11.398	12.060	8.40	289.50	306.30	P290
P295	0.331	11.594	12.256	8.40	294.50	311.30	P295
P300	0.331	11.791	11.791	8.40	299.50	316.30	P300
P305	0.331	11.988	11.988	8.40	304.50	321.30	P305
P310	0.331	12.185	12.185	8.40	309.50	326.30	P310
P315	0.331	12.382	12.382	8.40	314.50	331.30	P315
P320	0.331	12.579	12.579	8.40	319.50	336.30	P320
P325	0.331	12.776	12.776	8.40	324.50	341.30	P325
P330	0.331	12.972	12.972	8.40	329.50	346.30	P330
P335	0.331	13.169	13.169	8.40	334.50	351.30	P335
P340	0.331	13.366	13.366	8.40	339.50	356.30	P340
P345	0.331	13.563	13.563	8.40	344.50	361.30	P345
P350	0.331	13.760	13.760	8.40	349.50	366.30	P350
P355	0.331	13.957	13.957	8.40	354.50	371.30	P355
P360	0.331	14.154	14.154	8.40	359.50	376.30	P360
P365	0.331	14.350	14.350	8.40	364.50	381.30	P365
P370	0.331	14.547	14.547	8.40	369.50	386.30	P370
P375	0.331	14.744	14.744	8.40	374.50	391.30	P375
P380	0.331	14.941	14.941	8.40	379.50	396.30	P380
P385	0.331	15.138	15.138	8.40	384.50	401.30	P385
P390	0.331	15.335	15.335	8.40	389.50	406.30	P390
P395	0.331	15.531	15.531	8.40	394.50	411.30	P395
P400	0.331	15.728	15.728	8.40	399.50	416.30	P400
P405	0.331	15.925	15.925	8.40	404.50	421.30	P405
P410	0.331	16.122	16.122	8.40	409.50	426.30	P410
P415	0.331	16.319	16.319	8.40	414.50	431.30	P415
P420	0.331	16.516	16.516	8.40	419.50	436.30	P420
P425	0.331	16.713	16.713	8.40	424.50	441.30	P425
P430	0.331	16.909	16.909	8.40	429.50	446.30	P430
P435	0.331	17.106	17.106	8.40	434.50	451.30	P435

O-Ring Japanese Standard JIS Sizes

Size: JIS2401	C.S. Inch	I.D. Inch	O.D. Inch	C.S. MM	I.D. MM	O.D. MM	Size: JIS2401
P440	0.331	17.303	17.303	8.40	439.50	456.30	P440
P445	0.331	17.500	17.500	8.40	444.50	461.30	P445
P450	0.331	17.697	17.697	8.40	449.50	466.30	P450
P455	0.331	17.894	17.894	8.40	454.50	471.30	P455
P460	0.331	18.091	18.091	8.40	459.50	476.30	P460
P465	0.331	18.287	18.287	8.40	464.50	481.30	P465
P470	0.331	18.484	18.484	8.40	469.50	486.30	P470
P475	0.331	18.681	18.681	8.40	474.50	491.30	P475
P480	0.331	18.878	18.878	8.40	479.50	496.30	P480
P485	0.331	19.075	19.075	8.40	484.50	501.30	P485
P490	0.331	19.272	19.272	8.40	489.50	506.30	P490
P495	0.331	19.468	19.468	8.40	494.50	511.30	P495
P500	0.331	19.665	19.665	8.40	499.50	516.30	P500
P590	0.331	23.209	23.209	8.40	589.50	606.30	P590
P600	0.331	23.602	23.602	8.40	599.50	616.30	P600
P610	0.331	23.996	23.996	8.40	609.50	626.30	P610
P620	0.331	24.390	24.390	8.40	619.50	636.30	P620
P625	0.331	24.587	24.587	8.40	624.50	641.30	P625
P635	0.331	24.980	24.980	8.40	634.50	651.30	P635
P650	0.331	25.571	25.571	8.40	649.50	666.30	P650
P680	0.331	26.752	26.752	8.40	679.50	696.30	P680
P690	0.331	27.146	27.146	8.40	689.50	706.30	P690
P700	0.331	27.539	27.539	8.40	699.50	716.30	P700
P710	0.331	27.933	27.933	8.40	709.50	726.30	P710
P720	0.331	28.327	28.327	8.40	719.50	736.30	P720
P730	0.331	28.720	28.720	8.40	729.50	746.30	P730
P740	0.331	29.114	29.114	8.40	739.50	756.30	P740
P750	0.331	29.508	29.508	8.40	749.50	766.30	P750
P760	0.331	29.902	29.902	8.40	759.50	776.30	P760
P770	0.331	30.295	30.295	8.40	769.50	786.30	P770
P780	0.331	30.689	30.689	8.40	779.50	796.30	P780
P790	0.331	31.083	31.083	8.40	789.50	806.30	P790
P800	0.331	31.476	31.476	8.40	799.50	816.30	P800
P810	0.331	31.870	31.870	8.40	809.50	826.30	P810
P820	0.331	32.264	32.264	8.40	819.50	836.30	P820
P830	0.331	32.657	32.657	8.40	829.50	846.30	P830

O-Ring Japanese Standard JIS Sizes

Size: JIS2401	C.S. Inch	I.D. Inch	O.D. Inch	C.S. MM	I.D. MM	O.D. MM	Size: JIS2401
P840	0.331	33.051	33.051	8.40	839.50	856.30	P840
P850	0.331	33.445	33.445	8.40	849.50	866.30	P850
P860	0.331	33.839	33.839	8.40	859.50	876.30	P860
P870	0.331	34.232	34.232	8.40	869.50	886.30	P870
P880	0.331	34.626	34.626	8.40	879.50	896.30	P880
P890	0.331	35.020	35.020	8.40	889.50	906.30	P890
P900	0.331	35.413	35.413	8.40	899.50	916.30	P900
P910	0.331	35.807	35.807	8.40	909.50	926.30	P910
P915	0.331	36.004	36.004	8.40	914.50	931.30	P915
P920	0.331	36.201	36.201	8.40	919.50	936.30	P920
P930	0.331	36.594	36.594	8.40	929.50	946.30	P930
P940	0.331	36.988	36.988	8.40	939.50	956.30	P940
P950	0.331	37.382	37.382	8.40	949.50	966.30	P950
P960	0.331	37.776	37.776	8.40	959.50	976.30	P960
P970	0.331	38.169	38.169	8.40	969.50	986.30	P970
P980	0.331	38.563	38.563	8.40	979.50	996.30	P980
P990	0.331	38.957	38.957	8.40	989.50	1006.30	P990
P1000	0.331	39.350	39.350	8.40	999.50	1016.30	P1000
S3	0.059	0.098	0.216	1.50	2.50	5.50	S3
S4	0.059	0.138	0.256	1.50	3.50	6.50	S4
S5	0.059	0.177	0.295	1.50	4.50	7.50	S5
S6	0.059	0.217	0.335	1.50	5.50	8.50	S6
S7	0.059	0.256	0.374	1.50	6.50	9.50	S7
S8	0.059	0.295	0.413	1.50	7.50	10.50	S8
S9	0.059	0.335	0.453	1.50	8.50	11.50	S9
S10	0.059	0.374	0.492	1.50	9.50	12.50	S10
S11.2	0.059	0.421	0.539	1.50	10.70	13.70	S11.2
S12	0.059	0.453	0.571	1.50	11.50	14.50	S12
S12.5	0.059	0.472	0.590	1.50	12.00	15.00	S12.5
S14	0.059	0.531	0.649	1.50	13.50	16.50	S14
S15	0.059	0.571	0.689	1.50	14.50	17.50	S15
S16	0.059	0.610	0.728	1.50	15.50	18.50	S16
S18	0.059	0.689	0.807	1.50	17.50	20.50	S18
S20	0.059	0.768	0.886	1.50	19.50	22.50	S20
S22	0.059	0.846	0.964	1.50	21.50	24.50	S22
S22.4	0.079	0.862	1.020	2.00	21.90	25.90	S22.4

O-Ring Japanese Standard JIS Sizes

Size: JIS2401	C.S. Inch	I.D. Inch	O.D. Inch	C.S. MM	I.D. MM	O.D. MM	Size: JIS2401
S24	0.079	0.925	1.083	2.00	23.50	27.50	S24
S25	0.079	0.965	1.123	2.00	24.50	28.50	S25
S26	0.079	1.004	1.162	2.00	25.50	29.50	S26
S28	0.079	1.083	1.241	2.00	27.50	31.50	S28
S29	0.079	1.122	1.280	2.00	28.50	32.50	S29
S30	0.079	1.161	1.319	2.00	29.50	33.50	S30
S31.5	0.079	1.220	1.378	2.00	31.00	35.00	S31.5
S32	0.079	1.240	1.398	2.00	31.50	35.50	S32
S34	0.079	1.319	1.477	2.00	33.50	37.50	S34
S35	0.079	1.358	1.516	2.00	34.50	38.50	S35
S35.5	0.079	1.378	1.536	2.00	35.00	39.00	S35.5
S36	0.079	1.398	1.556	2.00	35.50	39.50	S36
S38	0.079	1.476	1.634	2.00	37.50	41.50	S38
S39	0.079	1.516	1.674	2.00	38.50	42.50	S39
S40	0.079	1.555	1.713	2.00	39.50	43.50	S40
S42	0.079	1.634	1.792	2.00	41.50	45.50	S42
S44	0.079	1.713	1.871	2.00	43.50	47.50	S44
S45	0.079	1.752	1.910	2.00	44.50	48.50	S45
S46	0.079	1.791	1.949	2.00	45.50	49.50	S46
S48	0.079	1.870	2.028	2.00	47.50	51.50	S48
S50	0.079	1.949	2.107	2.00	49.50	53.50	S50
S53	0.079	2.067	2.225	2.00	52.50	56.50	S53
S55	0.079	2.146	2.304	2.00	54.50	58.50	S55
S56	0.079	2.185	2.343	2.00	55.50	59.50	S56
S60	0.079	2.343	2.501	2.00	59.50	63.50	S60
S63	0.079	2.461	2.619	2.00	62.50	66.50	S63
S65	0.079	2.539	2.697	2.00	64.50	68.50	S65
S67	0.079	2.618	2.776	2.00	66.50	70.50	S67
S70	0.079	2.736	2.894	2.00	69.50	73.50	S70
S71	0.079	2.776	2.934	2.00	70.50	74.50	S71
S75	0.079	2.933	3.091	2.00	74.50	78.50	S75
S80	0.079	3.130	3.288	2.00	79.50	83.50	S80
S85	0.079	3.327	3.485	2.00	84.50	88.50	S85
S90	0.079	3.524	3.682	2.00	89.50	93.50	S90
S95	0.079	3.720	3.878	2.00	94.50	98.50	S95
S100	0.079	3.917	4.075	2.00	99.50	103.50	S100

O-Ring Japanese Standard JIS Sizes

Size: JIS2401	C.S. Inch	I.D. Inch	O.D. Inch	C.S. MM	I.D. MM	O.D. MM	Size: JIS2401
S105	0.079	4.114	4.272	2.00	104.50	108.50	S105
S110	0.079	4.311	4.469	2.00	109.50	113.50	S110
S112	0.079	4.390	4.548	2.00	111.50	115.50	S112
S115	0.079	4.508	4.666	2.00	114.50	118.50	S115
S120	0.079	4.705	4.863	2.00	119.50	123.50	S120
S125	0.079	4.902	5.060	2.00	124.50	128.50	S125
S130	0.079	5.098	5.256	2.00	129.50	133.50	S130
S132	0.079	5.177	5.335	2.00	131.50	135.50	S132
S135	0.079	5.295	5.453	2.00	134.50	138.50	S135
S140	0.079	5.492	5.650	2.00	139.50	143.50	S140
S145	0.079	5.689	5.847	2.00	144.50	148.50	S145
S150	0.079	5.886	6.044	2.00	149.50	153.50	S150
SS005	0.039	0.020	0.098	1.00	0.50	2.50	SS005
SS008	0.039	0.031	0.110	1.00	0.80	2.80	SS008
SS010	0.039	0.039	0.118	1.00	1.00	3.00	SS010
SS012	0.039	0.047	0.126	1.00	1.20	3.20	SS012
SS015	0.039	0.059	0.138	1.00	1.50	3.50	SS015
SS020	0.039	0.079	0.157	1.00	2.00	4.00	SS020
SS022	0.039	0.087	0.165	1.00	2.20	4.20	SS022
SS025	0.039	0.098	0.177	1.00	2.50	4.50	SS025
SS028	0.039	0.110	0.189	1.00	2.80	4.80	SS028
SS030	0.039	0.118	0.197	1.00	3.00	5.00	SS030
SS032	0.039	0.126	0.205	1.00	3.20	5.20	SS032
SS035	0.039	0.138	0.217	1.00	3.50	5.50	SS035
SS038	0.039	0.150	0.228	1.00	3.80	5.80	SS038
SS040	0.039	0.157	0.236	1.00	4.00	6.00	SS040
SS042	0.039	0.165	0.244	1.00	4.20	6.20	SS042
SS045	0.039	0.177	0.256	1.00	4.50	6.50	SS045
SS048	0.039	0.189	0.268	1.00	4.80	6.80	SS048
SS050	0.039	0.197	0.276	1.00	5.00	7.00	SS050
SS055	0.039	0.217	0.295	1.00	5.50	7.50	SS055
SS060	0.039	0.236	0.315	1.00	6.00	8.00	SS060
SS065	0.039	0.256	0.335	1.00	6.50	8.50	SS065
SS070	0.039	0.276	0.354	1.00	7.00	9.00	SS070
SS075	0.039	0.295	0.374	1.00	7.50	9.50	SS075
SS080	0.039	0.315	0.394	1.00	8.00	10.00	SS080

O-Ring Japanese Standard JIS Sizes

Size: JIS2401	C.S. Inch	I.D. Inch	O.D. Inch	C.S. MM	I.D. MM	O.D. MM	Size: JIS2401
SS085	0.039	0.335	0.413	1.00	8.50	10.50	SS085
SS090	0.039	0.354	0.433	1.00	9.00	11.00	SS090
SS095	0.039	0.374	0.453	1.00	9.50	11.50	SS095
SS100	0.039	0.394	0.472	1.00	10.00	12.00	SS100
SS105	0.039	0.413	0.492	1.00	10.50	12.50	SS105
SS110	0.039	0.433	0.512	1.00	11.00	13.00	SS110
SS115	0.039	0.453	0.531	1.00	11.50	13.50	SS115
SS120	0.039	0.472	0.551	1.00	12.00	14.00	SS120
SS125	0.039	0.492	0.571	1.00	12.50	14.50	SS125
SS130	0.039	0.512	0.591	1.00	13.00	15.00	SS130
SS135	0.039	0.531	0.610	1.00	13.50	15.50	SS135
SS140	0.039	0.551	0.630	1.00	14.00	16.00	SS140
SS145	0.039	0.571	0.650	1.00	14.50	16.50	SS145
SS150	0.039	0.591	0.669	1.00	15.00	17.00	SS150
SS155	0.039	0.610	0.689	1.00	15.50	17.50	SS155
SS160	0.039	0.630	0.709	1.00	16.00	18.00	SS160
SS165	0.039	0.650	0.728	1.00	16.50	18.50	SS165
SS170	0.039	0.669	0.748	1.00	17.00	19.00	SS170
SS175	0.039	0.689	0.768	1.00	17.50	19.50	SS175
SS180	0.039	0.709	0.787	1.00	18.00	20.00	SS180
SS185	0.039	0.728	0.807	1.00	18.50	20.50	SS185
SS190	0.039	0.748	0.827	1.00	19.00	21.00	SS190
SS195	0.039	0.768	0.846	1.00	19.50	21.50	SS195
SS200	0.039	0.787	0.866	1.00	20.00	22.00	SS200
V15	0.157	0.571	0.885	4.00	14.50	22.50	V15
V24	0.157	0.925	1.239	4.00	23.50	31.50	V24
V34	0.157	1.319	1.633	4.00	33.50	41.50	V34
V40	0.157	1.555	1.869	4.00	39.50	47.50	V40
V55	0.157	2.146	2.460	4.00	54.50	62.50	V55
V70	0.157	2.717	3.031	4.00	69.00	77.00	V70
V85	0.157	3.307	3.621	4.00	84.00	92.00	V85
V100	0.157	3.898	4.212	4.00	99.00	107.00	V100
V1055	0.394	41.102	41.890	10.00	1044.00	1064.00	V1055
V120	0.157	4.685	4.999	4.00	119.00	127.00	V120
V150	0.157	5.846	6.160	4.00	148.50	156.50	V150

O-Ring Japanese Standard JIS Sizes

Size: JIS2401	C.S. Inch	I.D. Inch	O.D. Inch	C.S. MM	I.D. MM	O.D. MM	Size: JIS2401
V175	0.157	6.811	7.125	4.00	173.00	181.00	V175
V225	0.236	8.760	9.232	6.00	222.50	234.50	V225
V275	0.236	10.709	11.181	6.00	272.00	284.00	V275
V325	0.236	12.657	13.129	6.00	321.50	333.50	V325
V380	0.236	14.803	15.275	6.00	376.00	388.00	V380
V430	0.236	16.752	17.224	6.00	425.50	437.50	V430
V480	0.394	18.701	19.489	10.00	475.00	495.00	V480
V530	0.394	20.650	21.438	10.00	524.50	544.50	V530
V585	0.394	22.795	23.583	10.00	579.00	599.00	V585
V640	0.394	24.941	25.729	10.00	633.50	653.50	V640
V690	0.394	26.890	27.678	10.00	683.00	703.00	V690
V740	0.394	28.839	29.627	10.00	732.50	752.50	V740
V790	0.394	30.787	31.575	10.00	782.00	802.00	V790
V845	0.394	32.933	33.721	10.00	836.50	856.50	V845
V950	0.394	37.028	37.816	10.00	940.50	960.50	V950