



O-Ring USA Standard Sizes

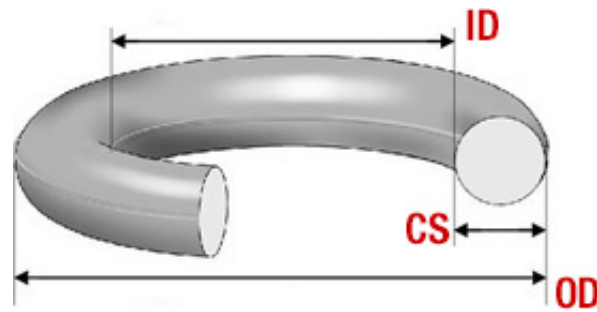


| Size: AS568 | C.S. Inch | I.D. Inch | O.D. Inch | C.S. MM | I.D. MM | O.D. MM | Size: AS568 |
|-------------|-----------|-----------|-----------|---------|---------|---------|-------------|
| 001 | 0.040 | 0.029 | 0.109 | 1.02 | 0.74 | 2.78 | 001 |
| 002 | 0.050 | 0.042 | 0.142 | 1.27 | 1.07 | 3.61 | 002 |
| 003 | 0.060 | 0.056 | 0.176 | 1.52 | 1.42 | 4.46 | 003 |
| 004 | 0.070 | 0.070 | 0.210 | 1.78 | 1.78 | 5.34 | 004 |
| 005 | 0.070 | 0.101 | 0.241 | 1.78 | 2.57 | 6.13 | 005 |
| 006 | 0.070 | 0.114 | 0.254 | 1.78 | 2.90 | 6.46 | 006 |
| 007 | 0.070 | 0.145 | 0.285 | 1.78 | 3.68 | 7.24 | 007 |
| 008 | 0.070 | 0.176 | 0.316 | 1.78 | 4.47 | 8.03 | 008 |
| 009 | 0.070 | 0.208 | 0.348 | 1.78 | 5.28 | 8.84 | 009 |
| 010 | 0.070 | 0.239 | 0.379 | 1.78 | 6.07 | 9.63 | 010 |
| 011 | 0.070 | 0.301 | 0.441 | 1.78 | 7.65 | 11.21 | 011 |
| 012 | 0.070 | 0.364 | 0.504 | 1.78 | 9.25 | 12.81 | 012 |
| 013 | 0.070 | 0.426 | 0.566 | 1.78 | 10.82 | 14.38 | 013 |
| 014 | 0.070 | 0.489 | 0.629 | 1.78 | 12.42 | 15.98 | 014 |
| 015 | 0.070 | 0.551 | 0.691 | 1.78 | 14.00 | 17.56 | 015 |
| 016 | 0.070 | 0.614 | 0.754 | 1.78 | 15.60 | 19.16 | 016 |
| 017 | 0.070 | 0.676 | 0.816 | 1.78 | 17.17 | 20.73 | 017 |
| 018 | 0.070 | 0.739 | 0.879 | 1.78 | 18.77 | 22.33 | 018 |
| 019 | 0.070 | 0.801 | 0.941 | 1.78 | 20.35 | 23.91 | 019 |
| 020 | 0.070 | 0.864 | 1.004 | 1.78 | 21.95 | 25.51 | 020 |
| 021 | 0.070 | 0.926 | 1.066 | 1.78 | 23.52 | 27.08 | 021 |
| 022 | 0.070 | 0.989 | 1.129 | 1.78 | 25.12 | 28.68 | 022 |
| 023 | 0.070 | 1.051 | 1.191 | 1.78 | 26.70 | 30.26 | 023 |
| 024 | 0.070 | 1.114 | 1.254 | 1.78 | 28.30 | 31.86 | 024 |
| 025 | 0.070 | 1.176 | 1.316 | 1.78 | 29.87 | 33.43 | 025 |

O-Ring S1000 Common Metric Sizes

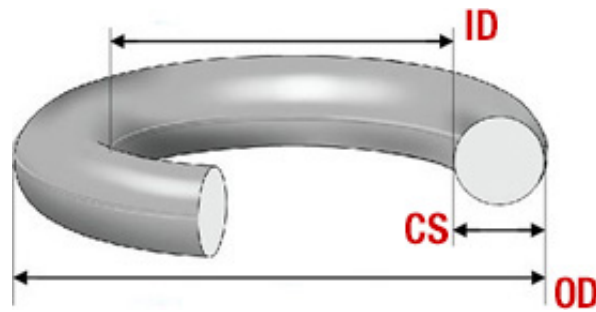


| Size: AS568 | C.S. Inch | I.D. Inch | O.D. Inch | C.S. MM | I.D. MM | O.D. MM | Size: AS568 |
|-------------|-----------|-----------|-----------|---------|---------|---------|-------------|
| 026 | 0.070 | 1.239 | 1.379 | 1.78 | 31.47 | 35.03 | 026 |
| 027 | 0.070 | 1.301 | 1.441 | 1.78 | 33.05 | 36.61 | 027 |
| 028 | 0.070 | 1.364 | 1.504 | 1.78 | 34.65 | 38.21 | 028 |
| 029 | 0.070 | 1.489 | 1.629 | 1.78 | 37.82 | 41.38 | 029 |
| 030 | 0.070 | 1.614 | 1.754 | 1.78 | 41.00 | 44.56 | 030 |
| 031 | 0.070 | 1.739 | 1.879 | 1.78 | 44.17 | 47.73 | 031 |
| 032 | 0.070 | 1.864 | 2.004 | 1.78 | 47.35 | 50.91 | 032 |
| 033 | 0.070 | 1.989 | 2.129 | 1.78 | 50.52 | 54.08 | 033 |
| 034 | 0.070 | 2.114 | 2.254 | 1.78 | 53.70 | 57.26 | 034 |
| 035 | 0.070 | 2.239 | 2.379 | 1.78 | 56.87 | 60.43 | 035 |
| 036 | 0.070 | 2.364 | 2.504 | 1.78 | 60.05 | 63.61 | 036 |
| 037 | 0.070 | 2.489 | 2.629 | 1.78 | 63.22 | 66.78 | 037 |
| 038 | 0.070 | 2.614 | 2.754 | 1.78 | 66.40 | 69.96 | 038 |
| 039 | 0.070 | 2.739 | 2.879 | 1.78 | 69.57 | 73.13 | 039 |
| 040 | 0.070 | 2.864 | 3.004 | 1.78 | 72.75 | 76.31 | 040 |
| 041 | 0.070 | 2.989 | 3.129 | 1.78 | 75.92 | 79.48 | 041 |
| 042 | 0.070 | 3.239 | 3.379 | 1.78 | 82.27 | 85.83 | 042 |
| 043 | 0.070 | 3.489 | 3.629 | 1.78 | 88.62 | 92.18 | 043 |
| 044 | 0.070 | 3.739 | 3.879 | 1.78 | 94.97 | 98.53 | 044 |
| 045 | 0.070 | 3.989 | 4.129 | 1.78 | 101.32 | 104.88 | 045 |
| 046 | 0.070 | 4.239 | 4.379 | 1.78 | 107.67 | 111.23 | 046 |
| 047 | 0.070 | 4.489 | 4.629 | 1.78 | 114.02 | 117.58 | 047 |
| 048 | 0.070 | 4.739 | 4.879 | 1.78 | 120.37 | 123.93 | 048 |
| 049 | 0.070 | 4.989 | 5.129 | 1.78 | 126.72 | 130.28 | 049 |
| 050 | 0.070 | 5.239 | 5.379 | 1.78 | 133.07 | 136.63 | 050 |

O-Ring S1000 Common Metric Sizes

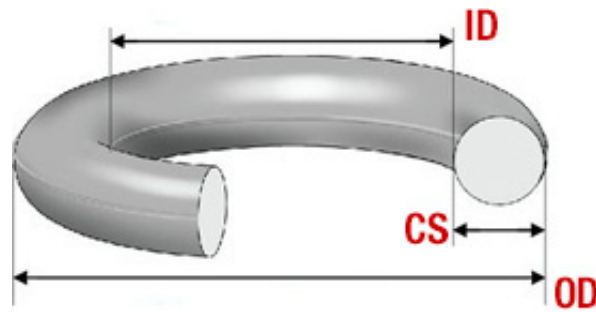


| Size: AS568 | C.S. Inch | I.D. Inch | O.D. Inch | C.S. MM | I.D. MM | O.D. MM | Size: AS568 |
|-------------|-----------|-----------|-----------|---------|---------|---------|-------------|
| 102 | 0.103 | 0.049 | 0.255 | 2.62 | 1.24 | 6.48 | 102 |
| 103 | 0.103 | 0.081 | 0.287 | 2.62 | 2.06 | 7.30 | 103 |
| 104 | 0.103 | 0.112 | 0.318 | 2.62 | 2.84 | 8.08 | 104 |
| 105 | 0.103 | 0.143 | 0.349 | 2.62 | 3.63 | 8.87 | 105 |
| 106 | 0.103 | 0.174 | 0.380 | 2.62 | 4.42 | 9.66 | 106 |
| 107 | 0.103 | 0.206 | 0.412 | 2.62 | 5.23 | 10.47 | 107 |
| 108 | 0.103 | 0.237 | 0.443 | 2.62 | 6.02 | 11.26 | 108 |
| 109 | 0.103 | 0.299 | 0.505 | 2.62 | 7.59 | 12.83 | 109 |
| 110 | 0.103 | 0.362 | 0.568 | 2.62 | 9.19 | 14.43 | 110 |
| 111 | 0.103 | 0.424 | 0.630 | 2.62 | 10.77 | 16.01 | 111 |
| 112 | 0.103 | 0.487 | 0.693 | 2.62 | 12.37 | 17.61 | 112 |
| 113 | 0.103 | 0.549 | 0.755 | 2.62 | 13.94 | 19.18 | 113 |
| 114 | 0.103 | 0.612 | 0.818 | 2.62 | 15.54 | 20.78 | 114 |
| 115 | 0.103 | 0.674 | 0.880 | 2.62 | 17.12 | 22.36 | 115 |
| 116 | 0.103 | 0.737 | 0.943 | 2.62 | 18.72 | 23.96 | 116 |
| 117 | 0.103 | 0.799 | 1.005 | 2.62 | 20.30 | 25.54 | 117 |
| 118 | 0.103 | 0.862 | 1.068 | 2.62 | 21.89 | 27.13 | 118 |
| 119 | 0.103 | 0.924 | 1.130 | 2.62 | 23.47 | 28.71 | 119 |
| 120 | 0.103 | 0.987 | 1.193 | 2.62 | 25.07 | 30.31 | 120 |
| 121 | 0.103 | 1.049 | 1.255 | 2.62 | 26.64 | 31.88 | 121 |
| 122 | 0.103 | 1.112 | 1.318 | 2.62 | 28.24 | 33.48 | 122 |
| 123 | 0.103 | 1.174 | 1.380 | 2.62 | 29.82 | 35.06 | 123 |
| 124 | 0.103 | 1.237 | 1.443 | 2.62 | 31.42 | 36.66 | 124 |
| 125 | 0.103 | 1.299 | 1.505 | 2.62 | 32.99 | 38.23 | 125 |
| 126 | 0.103 | 1.362 | 1.568 | 2.62 | 34.59 | 39.83 | 126 |

O-Ring S1000 Common Metric Sizes

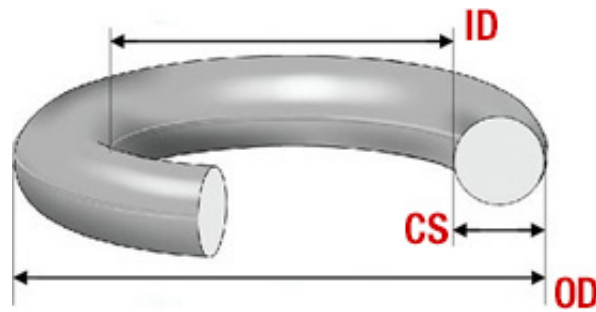


| Size: AS568 | C.S. Inch | I.D. Inch | O.D. Inch | C.S. MM | I.D. MM | O.D. MM | Size: AS568 |
|-------------|-----------|-----------|-----------|---------|---------|---------|-------------|
| 127 | 0.103 | 1.424 | 1.630 | 2.62 | 36.17 | 41.41 | 127 |
| 128 | 0.103 | 1.487 | 1.693 | 2.62 | 37.77 | 43.01 | 128 |
| 129 | 0.103 | 1.549 | 1.755 | 2.62 | 39.34 | 44.58 | 129 |
| 130 | 0.103 | 1.612 | 1.818 | 2.62 | 40.94 | 46.18 | 130 |
| 131 | 0.103 | 1.674 | 1.880 | 2.62 | 42.52 | 47.76 | 131 |
| 132 | 0.103 | 1.737 | 1.943 | 2.62 | 44.12 | 49.36 | 132 |
| 133 | 0.103 | 1.799 | 2.005 | 2.62 | 45.69 | 50.93 | 133 |
| 134 | 0.103 | 1.862 | 2.068 | 2.62 | 47.30 | 52.54 | 134 |
| 135 | 0.103 | 1.925 | 2.131 | 2.62 | 48.90 | 54.14 | 135 |
| 136 | 0.103 | 1.987 | 2.193 | 2.62 | 50.47 | 55.71 | 136 |
| 137 | 0.103 | 2.050 | 2.256 | 2.62 | 52.07 | 57.31 | 137 |
| 138 | 0.103 | 2.112 | 2.318 | 2.62 | 53.64 | 58.88 | 138 |
| 139 | 0.103 | 2.175 | 2.381 | 2.62 | 55.25 | 60.49 | 139 |
| 140 | 0.103 | 2.237 | 2.443 | 2.62 | 56.82 | 62.06 | 140 |
| 141 | 0.103 | 2.300 | 2.506 | 2.62 | 58.42 | 63.66 | 141 |
| 142 | 0.103 | 2.362 | 2.568 | 2.62 | 59.99 | 65.23 | 142 |
| 143 | 0.103 | 2.425 | 2.631 | 2.62 | 61.60 | 66.84 | 143 |
| 144 | 0.103 | 2.487 | 2.693 | 2.62 | 63.17 | 68.41 | 144 |
| 145 | 0.103 | 2.550 | 2.756 | 2.62 | 64.77 | 70.01 | 145 |
| 146 | 0.103 | 2.612 | 2.818 | 2.62 | 66.34 | 71.58 | 146 |
| 147 | 0.103 | 2.675 | 2.881 | 2.62 | 67.95 | 73.19 | 147 |
| 148 | 0.103 | 2.737 | 2.943 | 2.62 | 69.52 | 74.76 | 148 |
| 149 | 0.103 | 2.800 | 3.006 | 2.62 | 71.12 | 76.36 | 149 |
| 150 | 0.103 | 2.862 | 3.068 | 2.62 | 72.69 | 77.93 | 150 |
| 151 | 0.103 | 2.987 | 3.193 | 2.62 | 75.87 | 81.11 | 151 |

O-Ring S1000 Common Metric Sizes

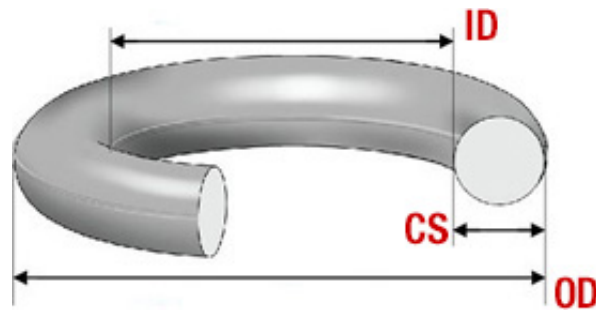


| Size: AS568 | C.S. Inch | I.D. Inch | O.D. Inch | C.S. MM | I.D. MM | O.D. MM | Size: AS568 |
|-------------|-----------|-----------|-----------|---------|---------|---------|-------------|
| 152 | 0.103 | 3.237 | 3.443 | 2.62 | 82.22 | 87.46 | 152 |
| 153 | 0.103 | 3.487 | 3.693 | 2.62 | 88.57 | 93.81 | 153 |
| 154 | 0.103 | 3.737 | 3.943 | 2.62 | 94.92 | 100.16 | 154 |
| 155 | 0.103 | 3.987 | 4.193 | 2.62 | 101.27 | 106.51 | 155 |
| 156 | 0.103 | 4.237 | 4.443 | 2.62 | 107.62 | 112.86 | 156 |
| 157 | 0.103 | 4.487 | 4.693 | 2.62 | 113.97 | 119.21 | 157 |
| 158 | 0.103 | 4.737 | 4.943 | 2.62 | 120.32 | 125.56 | 158 |
| 159 | 0.103 | 4.987 | 5.193 | 2.62 | 126.67 | 131.91 | 159 |
| 160 | 0.103 | 5.237 | 5.443 | 2.62 | 133.02 | 138.26 | 160 |
| 161 | 0.103 | 5.487 | 5.693 | 2.62 | 139.37 | 144.61 | 161 |
| 162 | 0.103 | 5.737 | 5.943 | 2.62 | 145.72 | 150.96 | 162 |
| 163 | 0.103 | 5.987 | 6.193 | 2.62 | 152.07 | 157.31 | 163 |
| 164 | 0.103 | 6.237 | 6.443 | 2.62 | 158.42 | 163.66 | 164 |
| 165 | 0.103 | 6.487 | 6.693 | 2.62 | 164.77 | 170.01 | 165 |
| 166 | 0.103 | 6.737 | 6.943 | 2.62 | 171.12 | 176.36 | 166 |
| 167 | 0.103 | 6.987 | 7.193 | 2.62 | 177.47 | 182.71 | 167 |
| 168 | 0.103 | 7.237 | 7.443 | 2.62 | 183.82 | 189.06 | 168 |
| 169 | 0.103 | 7.487 | 7.693 | 2.62 | 190.17 | 195.41 | 169 |
| 170 | 0.103 | 7.737 | 7.943 | 2.62 | 196.52 | 201.76 | 170 |
| 171 | 0.103 | 7.987 | 8.193 | 2.62 | 202.87 | 208.11 | 171 |
| 172 | 0.103 | 8.237 | 8.443 | 2.62 | 209.22 | 214.46 | 172 |
| 173 | 0.103 | 8.487 | 8.693 | 2.62 | 215.57 | 220.81 | 173 |
| 174 | 0.103 | 8.737 | 8.943 | 2.62 | 221.92 | 227.16 | 174 |
| 175 | 0.103 | 8.987 | 9.193 | 2.62 | 228.27 | 233.51 | 175 |
| 176 | 0.103 | 9.237 | 9.443 | 2.62 | 234.62 | 239.86 | 176 |

O-Ring S1000 Common Metric Sizes

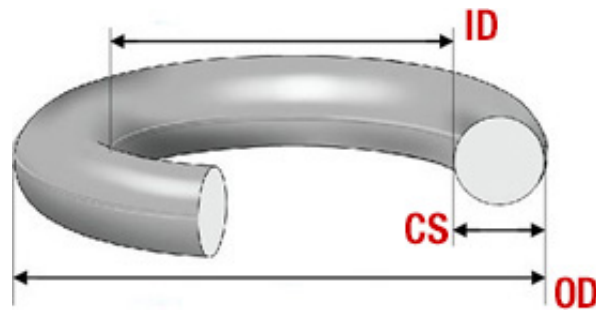


| Size: AS568 | C.S. Inch | I.D. Inch | O.D. Inch | C.S. MM | I.D. MM | O.D. MM | Size: AS568 |
|-------------|-----------|-----------|-----------|---------|---------|---------|-------------|
| 177 | 0.103 | 9.487 | 9.693 | 2.62 | 240.97 | 246.21 | 177 |
| 178 | 0.103 | 9.737 | 9.943 | 2.62 | 247.32 | 252.56 | 178 |
| 201 | 0.139 | 0.171 | 0.449 | 3.53 | 4.34 | 11.40 | 201 |
| 202 | 0.139 | 0.234 | 0.512 | 3.53 | 5.94 | 13.00 | 202 |
| 203 | 0.139 | 0.296 | 0.574 | 3.53 | 7.52 | 14.58 | 203 |
| 204 | 0.139 | 0.359 | 0.637 | 3.53 | 9.12 | 16.18 | 204 |
| 205 | 0.139 | 0.421 | 0.699 | 3.53 | 10.69 | 17.75 | 205 |
| 206 | 0.139 | 0.484 | 0.762 | 3.53 | 12.29 | 19.35 | 206 |
| 207 | 0.139 | 0.546 | 0.824 | 3.53 | 13.87 | 20.93 | 207 |
| 208 | 0.139 | 0.609 | 0.887 | 3.53 | 15.47 | 22.53 | 208 |
| 209 | 0.139 | 0.671 | 0.949 | 3.53 | 17.04 | 24.10 | 209 |
| 210 | 0.139 | 0.734 | 1.012 | 3.53 | 18.64 | 25.70 | 210 |
| 211 | 0.139 | 0.796 | 1.074 | 3.53 | 20.22 | 27.28 | 211 |
| 212 | 0.139 | 0.859 | 1.137 | 3.53 | 21.82 | 28.88 | 212 |
| 213 | 0.139 | 0.921 | 1.199 | 3.53 | 23.39 | 30.45 | 213 |
| 214 | 0.139 | 0.984 | 1.262 | 3.53 | 25.00 | 32.06 | 214 |
| 215 | 0.139 | 1.046 | 1.324 | 3.53 | 26.57 | 33.63 | 215 |
| 216 | 0.139 | 1.109 | 1.387 | 3.53 | 28.17 | 35.23 | 216 |
| 217 | 0.139 | 1.171 | 1.449 | 3.53 | 29.74 | 36.80 | 217 |
| 218 | 0.139 | 1.234 | 1.512 | 3.53 | 31.34 | 38.40 | 218 |
| 219 | 0.139 | 1.296 | 1.574 | 3.53 | 32.92 | 39.98 | 219 |
| 220 | 0.139 | 1.359 | 1.637 | 3.53 | 34.52 | 41.58 | 220 |
| 221 | 0.139 | 1.421 | 1.699 | 3.53 | 36.09 | 43.15 | 221 |
| 222 | 0.139 | 1.484 | 1.762 | 3.53 | 37.69 | 44.75 | 222 |
| 223 | 0.139 | 1.609 | 1.887 | 3.53 | 40.87 | 47.93 | 223 |

O-Ring S1000 Common Metric Sizes

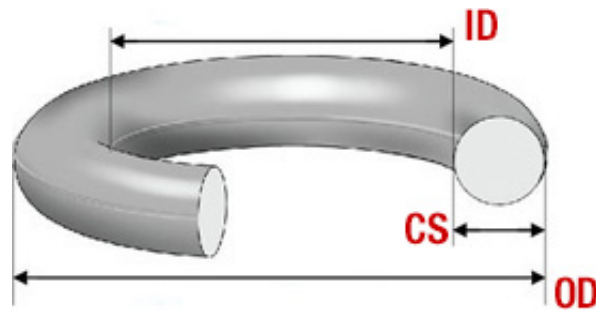


| Size: AS568 | C.S. Inch | I.D. Inch | O.D. Inch | C.S. MM | I.D. MM | O.D. MM | Size: AS568 |
|-------------|-----------|-----------|-----------|---------|---------|---------|-------------|
| 224 | 0.139 | 1.734 | 2.012 | 3.53 | 44.04 | 51.10 | 224 |
| 225 | 0.139 | 1.859 | 2.137 | 3.53 | 47.22 | 54.28 | 225 |
| 226 | 0.139 | 1.984 | 2.262 | 3.53 | 50.39 | 57.45 | 226 |
| 227 | 0.139 | 2.109 | 2.387 | 3.53 | 53.57 | 60.63 | 227 |
| 228 | 0.139 | 2.234 | 2.512 | 3.53 | 56.74 | 63.80 | 228 |
| 229 | 0.139 | 2.359 | 2.637 | 3.53 | 59.92 | 66.98 | 229 |
| 230 | 0.139 | 2.484 | 2.762 | 3.53 | 63.09 | 70.15 | 230 |
| 231 | 0.139 | 2.609 | 2.887 | 3.53 | 66.27 | 73.33 | 231 |
| 232 | 0.139 | 2.734 | 3.012 | 3.53 | 69.44 | 76.50 | 232 |
| 233 | 0.139 | 2.859 | 3.137 | 3.53 | 72.62 | 79.68 | 233 |
| 234 | 0.139 | 2.984 | 3.262 | 3.53 | 75.79 | 82.85 | 234 |
| 235 | 0.139 | 3.109 | 3.387 | 3.53 | 78.97 | 86.03 | 235 |
| 236 | 0.139 | 3.234 | 3.512 | 3.53 | 82.14 | 89.20 | 236 |
| 237 | 0.139 | 3.359 | 3.637 | 3.53 | 85.32 | 92.38 | 237 |
| 238 | 0.139 | 3.484 | 3.762 | 3.53 | 88.49 | 95.55 | 238 |
| 239 | 0.139 | 3.609 | 3.887 | 3.53 | 91.67 | 98.73 | 239 |
| 240 | 0.139 | 3.734 | 4.012 | 3.53 | 94.84 | 101.90 | 240 |
| 241 | 0.139 | 3.859 | 4.137 | 3.53 | 98.02 | 105.08 | 241 |
| 242 | 0.139 | 3.984 | 4.262 | 3.53 | 101.19 | 108.25 | 242 |
| 243 | 0.139 | 4.109 | 4.387 | 3.53 | 104.37 | 111.43 | 243 |
| 244 | 0.139 | 4.234 | 4.512 | 3.53 | 107.54 | 114.60 | 244 |
| 245 | 0.139 | 4.359 | 4.637 | 3.53 | 110.72 | 117.78 | 245 |
| 246 | 0.139 | 4.484 | 4.762 | 3.53 | 113.89 | 120.95 | 246 |
| 247 | 0.139 | 4.609 | 4.887 | 3.53 | 117.07 | 124.13 | 247 |
| 248 | 0.139 | 4.734 | 5.012 | 3.53 | 120.24 | 127.30 | 248 |

O-Ring S1000 Common Metric Sizes

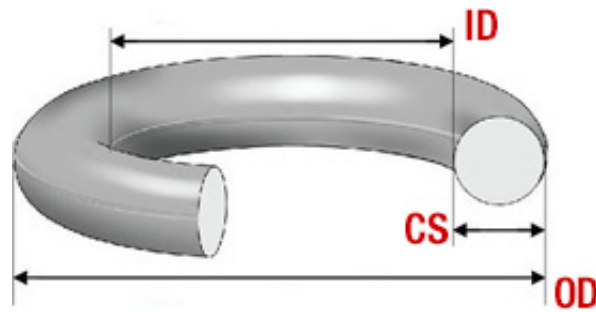


| Size: AS568 | C.S. Inch | I.D. Inch | O.D. Inch | C.S. MM | I.D. MM | O.D. MM | Size: AS568 |
|-------------|-----------|-----------|-----------|---------|---------|---------|-------------|
| 249 | 0.139 | 4.859 | 5.137 | 3.53 | 123.42 | 130.48 | 249 |
| 250 | 0.139 | 4.984 | 5.262 | 3.53 | 126.59 | 133.65 | 250 |
| 251 | 0.139 | 5.109 | 5.387 | 3.53 | 129.77 | 136.83 | 251 |
| 252 | 0.139 | 5.234 | 5.512 | 3.53 | 132.94 | 140.00 | 252 |
| 253 | 0.139 | 5.359 | 5.637 | 3.53 | 136.12 | 143.18 | 253 |
| 254 | 0.139 | 5.484 | 5.762 | 3.53 | 139.29 | 146.35 | 254 |
| 255 | 0.139 | 5.609 | 5.887 | 3.53 | 142.47 | 149.53 | 255 |
| 256 | 0.139 | 5.734 | 6.012 | 3.53 | 145.65 | 152.71 | 256 |
| 257 | 0.139 | 5.859 | 6.137 | 3.53 | 148.82 | 155.88 | 257 |
| 258 | 0.139 | 5.984 | 6.262 | 3.53 | 151.99 | 159.05 | 258 |
| 259 | 0.139 | 6.234 | 6.512 | 3.53 | 158.34 | 165.40 | 259 |
| 260 | 0.139 | 6.484 | 6.762 | 3.53 | 164.69 | 171.75 | 260 |
| 261 | 0.139 | 6.734 | 7.012 | 3.53 | 171.04 | 178.10 | 261 |
| 262 | 0.139 | 6.984 | 7.262 | 3.53 | 177.39 | 184.45 | 262 |
| 263 | 0.139 | 7.234 | 7.512 | 3.53 | 183.74 | 190.80 | 263 |
| 264 | 0.139 | 7.484 | 7.762 | 3.53 | 190.09 | 197.15 | 264 |
| 265 | 0.139 | 7.734 | 8.012 | 3.53 | 196.44 | 203.50 | 265 |
| 266 | 0.139 | 7.984 | 8.262 | 3.53 | 202.79 | 209.85 | 266 |
| 267 | 0.139 | 8.234 | 8.512 | 3.53 | 209.14 | 216.20 | 267 |
| 268 | 0.139 | 8.484 | 8.762 | 3.53 | 215.49 | 222.55 | 268 |
| 269 | 0.139 | 8.734 | 9.012 | 3.53 | 221.84 | 228.90 | 269 |
| 270 | 0.139 | 8.984 | 9.262 | 3.53 | 228.19 | 235.25 | 270 |
| 271 | 0.139 | 9.234 | 9.512 | 3.53 | 234.54 | 241.60 | 271 |
| 272 | 0.139 | 9.484 | 9.762 | 3.53 | 240.89 | 247.95 | 272 |
| 273 | 0.139 | 9.734 | 10.012 | 3.53 | 247.24 | 254.30 | 273 |

O-Ring S1000 Common Metric Sizes

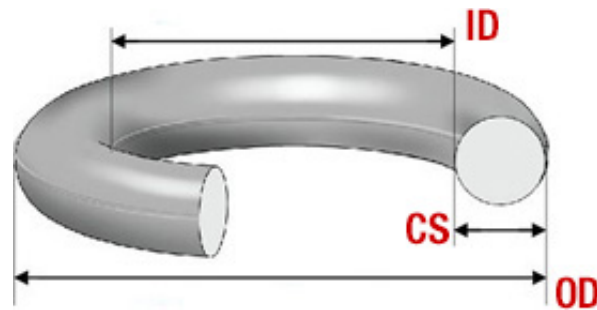


| Size: AS568 | C.S. Inch | I.D. Inch | O.D. Inch | C.S. MM | I.D. MM | O.D. MM | Size: AS568 |
|-------------|-----------|-----------|-----------|---------|---------|---------|-------------|
| 274 | 0.139 | 9.984 | 10.262 | 3.53 | 253.59 | 260.65 | 274 |
| 275 | 0.139 | 10.484 | 10.762 | 3.53 | 266.29 | 273.35 | 275 |
| 276 | 0.139 | 10.984 | 11.262 | 3.53 | 278.99 | 286.05 | 276 |
| 277 | 0.139 | 11.484 | 11.762 | 3.53 | 291.69 | 298.75 | 277 |
| 278 | 0.139 | 11.984 | 12.262 | 3.53 | 304.39 | 311.45 | 278 |
| 279 | 0.139 | 12.984 | 13.262 | 3.53 | 329.79 | 336.85 | 279 |
| 280 | 0.139 | 13.984 | 14.262 | 3.53 | 355.19 | 362.25 | 280 |
| 281 | 0.139 | 14.984 | 15.262 | 3.53 | 380.59 | 387.65 | 281 |
| 282 | 0.139 | 15.955 | 16.233 | 3.53 | 405.26 | 412.32 | 282 |
| 283 | 0.139 | 16.955 | 17.233 | 3.53 | 430.66 | 437.72 | 283 |
| 284 | 0.139 | 17.955 | 18.233 | 3.53 | 456.06 | 463.12 | 284 |
| 309 | 0.210 | 0.412 | 0.832 | 5.33 | 10.46 | 21.12 | 309 |
| 310 | 0.210 | 0.475 | 0.895 | 5.33 | 12.07 | 22.73 | 310 |
| 311 | 0.210 | 0.537 | 0.957 | 5.33 | 13.64 | 24.30 | 311 |
| 312 | 0.210 | 0.600 | 1.020 | 5.33 | 15.24 | 25.90 | 312 |
| 313 | 0.210 | 0.662 | 1.082 | 5.33 | 16.81 | 27.47 | 313 |
| 314 | 0.210 | 0.725 | 1.145 | 5.33 | 18.42 | 29.08 | 314 |
| 315 | 0.210 | 0.787 | 1.207 | 5.33 | 19.99 | 30.65 | 315 |
| 316 | 0.210 | 0.850 | 1.270 | 5.33 | 21.59 | 32.25 | 316 |
| 317 | 0.210 | 0.912 | 1.332 | 5.33 | 23.16 | 33.82 | 317 |
| 318 | 0.210 | 0.975 | 1.395 | 5.33 | 24.77 | 35.43 | 318 |
| 319 | 0.210 | 1.037 | 1.457 | 5.33 | 26.34 | 37.00 | 319 |
| 320 | 0.210 | 1.100 | 1.520 | 5.33 | 27.94 | 38.60 | 320 |
| 321 | 0.210 | 1.162 | 1.582 | 5.33 | 29.51 | 40.17 | 321 |
| 322 | 0.210 | 1.225 | 1.645 | 5.33 | 31.12 | 41.78 | 322 |

O-Ring S1000 Common Metric Sizes

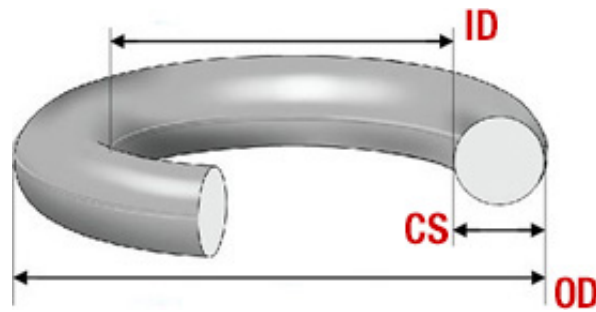


| Size: AS568 | C.S. Inch | I.D. Inch | O.D. Inch | C.S. MM | I.D. MM | O.D. MM | Size: AS568 |
|-------------|-----------|-----------|-----------|---------|---------|---------|-------------|
| 323 | 0.210 | 1.287 | 1.707 | 5.33 | 32.69 | 43.35 | 323 |
| 324 | 0.210 | 1.350 | 1.770 | 5.33 | 34.29 | 44.95 | 324 |
| 325 | 0.210 | 1.475 | 1.895 | 5.33 | 37.47 | 48.13 | 325 |
| 326 | 0.210 | 1.600 | 2.020 | 5.33 | 40.64 | 51.30 | 326 |
| 327 | 0.210 | 1.725 | 2.145 | 5.33 | 43.82 | 54.48 | 327 |
| 328 | 0.210 | 1.850 | 2.270 | 5.33 | 46.99 | 57.65 | 328 |
| 329 | 0.210 | 1.975 | 2.395 | 5.33 | 50.17 | 60.83 | 329 |
| 330 | 0.210 | 2.100 | 2.520 | 5.33 | 53.34 | 64.00 | 330 |
| 331 | 0.210 | 2.225 | 2.645 | 5.33 | 56.52 | 67.18 | 331 |
| 332 | 0.210 | 2.350 | 2.770 | 5.33 | 59.69 | 70.35 | 332 |
| 333 | 0.210 | 2.475 | 2.895 | 5.33 | 62.87 | 73.53 | 333 |
| 334 | 0.210 | 2.600 | 3.020 | 5.33 | 66.04 | 76.70 | 334 |
| 335 | 0.210 | 2.725 | 3.145 | 5.33 | 69.22 | 79.88 | 335 |
| 336 | 0.210 | 2.850 | 3.270 | 5.33 | 72.39 | 83.05 | 336 |
| 337 | 0.210 | 2.975 | 3.395 | 5.33 | 75.57 | 86.23 | 337 |
| 338 | 0.210 | 3.100 | 3.520 | 5.33 | 78.74 | 89.40 | 338 |
| 339 | 0.210 | 3.225 | 3.645 | 5.33 | 91.92 | 102.58 | 339 |
| 340 | 0.210 | 3.350 | 3.770 | 5.33 | 85.09 | 95.75 | 340 |
| 341 | 0.210 | 3.475 | 3.895 | 5.33 | 88.27 | 98.93 | 341 |
| 342 | 0.210 | 3.600 | 4.020 | 5.33 | 91.44 | 102.10 | 342 |
| 343 | 0.210 | 3.725 | 4.145 | 5.33 | 94.62 | 105.28 | 343 |
| 344 | 0.210 | 3.850 | 4.270 | 5.33 | 97.79 | 108.45 | 344 |
| 345 | 0.210 | 3.975 | 4.395 | 5.33 | 100.97 | 111.63 | 345 |
| 346 | 0.210 | 4.100 | 4.520 | 5.33 | 104.14 | 114.80 | 346 |
| 347 | 0.210 | 4.225 | 4.645 | 5.33 | 107.32 | 117.98 | 347 |

O-Ring S1000 Common Metric Sizes

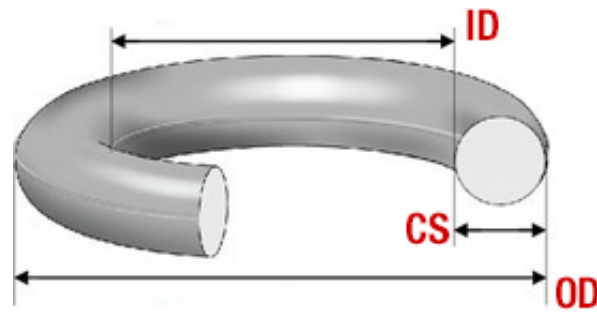


| Size: AS568 | C.S. Inch | I.D. Inch | O.D. Inch | C.S. MM | I.D. MM | O.D. MM | Size: AS568 |
|-------------|-----------|-----------|-----------|---------|---------|---------|-------------|
| 348 | 0.210 | 4.350 | 4.770 | 5.33 | 110.49 | 121.15 | 348 |
| 349 | 0.210 | 4.475 | 4.895 | 5.33 | 113.67 | 124.33 | 349 |
| 350 | 0.210 | 4.600 | 5.020 | 5.33 | 116.84 | 127.50 | 350 |
| 351 | 0.210 | 4.725 | 5.145 | 5.33 | 120.02 | 130.68 | 351 |
| 352 | 0.210 | 4.850 | 5.270 | 5.33 | 123.19 | 133.85 | 352 |
| 353 | 0.210 | 4.975 | 5.395 | 5.33 | 126.37 | 137.03 | 353 |
| 354 | 0.210 | 5.100 | 5.520 | 5.33 | 129.54 | 140.20 | 354 |
| 355 | 0.210 | 5.225 | 5.645 | 5.33 | 132.72 | 143.38 | 355 |
| 356 | 0.210 | 5.350 | 5.770 | 5.33 | 135.89 | 146.55 | 356 |
| 357 | 0.210 | 5.475 | 5.895 | 5.33 | 139.07 | 149.73 | 357 |
| 358 | 0.210 | 5.600 | 6.020 | 5.33 | 142.24 | 152.90 | 358 |
| 359 | 0.210 | 5.725 | 6.145 | 5.33 | 145.42 | 156.08 | 359 |
| 360 | 0.210 | 5.850 | 6.270 | 5.33 | 148.59 | 159.25 | 360 |
| 361 | 0.210 | 5.975 | 6.395 | 5.33 | 151.77 | 162.43 | 361 |
| 362 | 0.210 | 6.225 | 6.645 | 5.33 | 158.12 | 168.78 | 362 |
| 363 | 0.210 | 6.475 | 6.895 | 5.33 | 164.47 | 175.13 | 363 |
| 364 | 0.210 | 6.725 | 7.145 | 5.33 | 170.82 | 181.48 | 364 |
| 365 | 0.210 | 6.975 | 7.395 | 5.33 | 177.17 | 187.83 | 365 |
| 366 | 0.210 | 7.225 | 7.645 | 5.33 | 183.52 | 194.18 | 366 |
| 367 | 0.210 | 7.475 | 7.895 | 5.33 | 189.87 | 200.53 | 367 |
| 368 | 0.210 | 7.725 | 8.145 | 5.33 | 196.22 | 206.88 | 368 |
| 369 | 0.210 | 7.975 | 8.395 | 5.33 | 202.57 | 213.23 | 369 |
| 370 | 0.210 | 8.225 | 8.645 | 5.33 | 208.92 | 219.58 | 370 |
| 371 | 0.210 | 8.475 | 8.895 | 5.33 | 215.27 | 225.93 | 371 |
| 372 | 0.210 | 8.725 | 9.145 | 5.33 | 221.62 | 232.28 | 372 |

O-Ring S1000 Common Metric Sizes

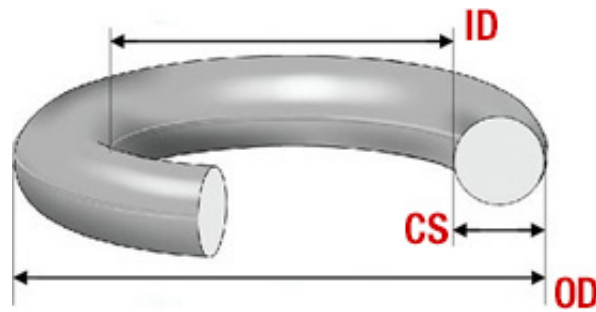


| Size: AS568 | C.S. Inch | I.D. Inch | O.D. Inch | C.S. MM | I.D. MM | O.D. MM | Size: AS568 |
|-------------|-----------|-----------|-----------|---------|---------|---------|-------------|
| 373 | 0.210 | 8.975 | 9.395 | 5.33 | 227.97 | 238.63 | 373 |
| 374 | 0.210 | 9.225 | 9.645 | 5.33 | 234.32 | 244.98 | 374 |
| 375 | 0.210 | 9.475 | 9.895 | 5.33 | 240.67 | 251.33 | 375 |
| 376 | 0.210 | 9.725 | 10.145 | 5.33 | 247.02 | 257.68 | 376 |
| 377 | 0.210 | 9.975 | 10.395 | 5.33 | 253.37 | 264.03 | 377 |
| 378 | 0.210 | 10.475 | 10.895 | 5.33 | 266.07 | 276.73 | 378 |
| 379 | 0.210 | 10.975 | 11.395 | 5.33 | 278.77 | 289.43 | 379 |
| 380 | 0.210 | 11.475 | 11.895 | 5.33 | 291.47 | 302.13 | 380 |
| 381 | 0.210 | 11.975 | 12.395 | 5.33 | 304.17 | 314.83 | 381 |
| 382 | 0.210 | 12.975 | 13.395 | 5.33 | 329.57 | 340.23 | 382 |
| 383 | 0.210 | 13.975 | 14.395 | 5.33 | 354.97 | 365.63 | 383 |
| 384 | 0.210 | 14.975 | 15.395 | 5.33 | 380.37 | 391.03 | 384 |
| 385 | 0.210 | 15.955 | 16.375 | 5.33 | 405.26 | 415.92 | 385 |
| 386 | 0.210 | 16.955 | 17.375 | 5.33 | 430.66 | 441.32 | 386 |
| 387 | 0.210 | 17.955 | 18.375 | 5.33 | 456.06 | 466.72 | 387 |
| 388 | 0.210 | 18.955 | 19.375 | 5.33 | 481.41 | 492.07 | 388 |
| 389 | 0.210 | 19.955 | 20.375 | 5.33 | 506.81 | 517.47 | 389 |
| 390 | 0.210 | 20.955 | 21.375 | 5.33 | 532.21 | 542.87 | 390 |
| 391 | 0.210 | 21.955 | 22.375 | 5.33 | 557.61 | 568.27 | 391 |
| 392 | 0.210 | 22.940 | 23.360 | 5.33 | 582.68 | 593.34 | 392 |
| 393 | 0.210 | 23.940 | 24.360 | 5.33 | 608.08 | 618.74 | 393 |
| 394 | 0.210 | 24.940 | 25.360 | 5.33 | 633.48 | 644.14 | 394 |
| 395 | 0.210 | 25.940 | 26.360 | 5.33 | 658.88 | 669.54 | 395 |

O-Ring S1000 Common Metric Sizes

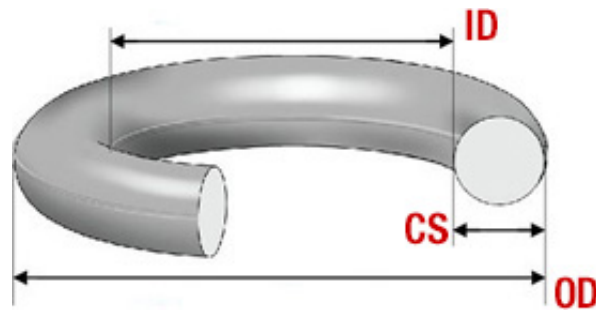


| Size | C.S. Inch | I.D. Inch | O.D. Inch | C.S. MM | I.D. MM | O.D. MM | Size |
|------|-----------|-----------|-----------|---------|---------|---------|------|
| 400 | 0.275 | 1.350 | 1.900 | 6.99 | 34.29 | 48.26 | 400 |
| 401 | 0.275 | 1.475 | 2.025 | 6.99 | 37.47 | 51.44 | 401 |
| 402 | 0.275 | 1.600 | 2.150 | 6.99 | 40.64 | 54.61 | 402 |
| 403 | 0.275 | 1.725 | 2.275 | 6.99 | 43.82 | 57.79 | 403 |
| 404 | 0.275 | 1.850 | 2.400 | 6.99 | 46.99 | 60.96 | 404 |
| 405 | 0.275 | 1.975 | 2.525 | 6.99 | 50.17 | 64.14 | 405 |
| 406 | 0.275 | 2.100 | 2.650 | 6.99 | 53.34 | 67.31 | 406 |
| 407 | 0.275 | 2.225 | 2.775 | 6.99 | 56.52 | 70.49 | 407 |
| 408 | 0.275 | 2.350 | 2.900 | 6.99 | 59.69 | 73.66 | 408 |
| 409 | 0.275 | 2.475 | 3.025 | 6.99 | 62.87 | 76.84 | 409 |
| 410 | 0.275 | 2.600 | 3.150 | 6.99 | 66.04 | 80.01 | 410 |
| 411 | 0.275 | 2.725 | 3.275 | 6.99 | 69.22 | 83.19 | 411 |
| 412 | 0.275 | 2.850 | 3.400 | 6.99 | 72.39 | 86.36 | 412 |
| 413 | 0.275 | 2.975 | 3.525 | 6.99 | 75.57 | 89.54 | 413 |
| 414 | 0.275 | 3.100 | 3.650 | 6.99 | 78.74 | 92.71 | 414 |
| 415 | 0.275 | 3.225 | 3.775 | 6.99 | 81.92 | 95.89 | 415 |
| 416 | 0.275 | 3.350 | 3.900 | 6.99 | 85.09 | 99.06 | 416 |
| 417 | 0.275 | 3.475 | 4.025 | 6.99 | 88.27 | 102.24 | 417 |
| 418 | 0.275 | 3.600 | 4.150 | 6.99 | 91.44 | 105.41 | 418 |
| 419 | 0.275 | 3.725 | 4.275 | 6.99 | 94.62 | 108.59 | 419 |
| 420 | 0.275 | 3.850 | 4.400 | 6.99 | 97.79 | 111.76 | 420 |
| 421 | 0.275 | 3.975 | 4.525 | 6.99 | 100.97 | 114.94 | 421 |
| 422 | 0.275 | 4.100 | 4.650 | 6.99 | 104.14 | 118.11 | 422 |
| 423 | 0.275 | 4.225 | 4.775 | 6.99 | 107.32 | 121.29 | 423 |
| 424 | 0.275 | 4.350 | 4.900 | 6.99 | 110.49 | 124.46 | 424 |
| 425 | 0.275 | 4.475 | 5.025 | 6.99 | 113.67 | 127.65 | 425 |

O-Ring S1000 Common Metric Sizes

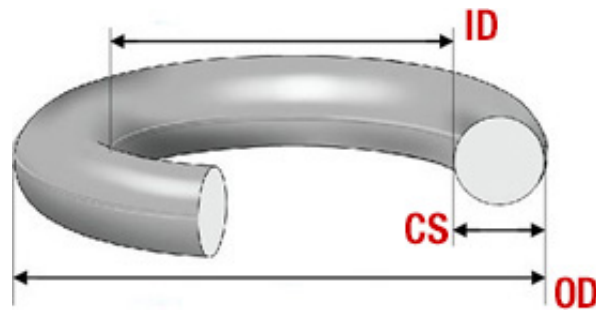


| Size: AS568 | C.S. Inch | I.D. Inch | O.D. Inch | C.S. MM | I.D. MM | O.D. MM | Size: AS568 |
|-------------|-----------|-----------|-----------|---------|---------|---------|-------------|
| 426 | 0.275 | 4.600 | 5.150 | 6.99 | 116.84 | 130.82 | 426 |
| 427 | 0.275 | 4.725 | 5.275 | 6.99 | 120.02 | 134.00 | 427 |
| 428 | 0.275 | 4.850 | 5.400 | 6.99 | 123.19 | 137.17 | 428 |
| 429 | 0.275 | 4.975 | 5.525 | 6.99 | 126.37 | 140.35 | 429 |
| 430 | 0.275 | 5.100 | 5.650 | 6.99 | 129.54 | 143.52 | 430 |
| 431 | 0.275 | 5.225 | 5.775 | 6.99 | 132.72 | 146.70 | 431 |
| 432 | 0.275 | 5.350 | 5.900 | 6.99 | 135.89 | 149.87 | 432 |
| 433 | 0.275 | 5.475 | 6.025 | 6.99 | 139.07 | 153.05 | 433 |
| 434 | 0.275 | 5.600 | 6.150 | 6.99 | 142.24 | 156.22 | 434 |
| 435 | 0.275 | 5.725 | 6.275 | 6.99 | 145.42 | 159.40 | 435 |
| 436 | 0.275 | 5.850 | 6.400 | 6.99 | 148.59 | 162.57 | 436 |
| 437 | 0.275 | 5.975 | 6.525 | 6.99 | 151.77 | 165.75 | 437 |
| 438 | 0.275 | 6.225 | 6.775 | 6.99 | 158.12 | 172.10 | 438 |
| 439 | 0.275 | 6.475 | 7.025 | 6.99 | 164.47 | 178.45 | 439 |
| 440 | 0.275 | 6.725 | 7.275 | 6.99 | 170.82 | 184.80 | 440 |
| 441 | 0.275 | 6.975 | 7.525 | 6.99 | 177.17 | 191.15 | 441 |
| 442 | 0.275 | 7.225 | 7.775 | 6.99 | 183.52 | 197.50 | 442 |
| 443 | 0.275 | 7.475 | 8.025 | 6.99 | 189.87 | 203.85 | 443 |
| 444 | 0.275 | 7.725 | 8.275 | 6.99 | 196.22 | 210.20 | 444 |
| 445 | 0.275 | 7.975 | 8.525 | 6.99 | 202.57 | 216.55 | 445 |
| 446 | 0.275 | 8.475 | 9.025 | 6.99 | 215.27 | 229.25 | 446 |
| 447 | 0.275 | 8.975 | 9.525 | 6.99 | 227.97 | 241.95 | 447 |
| 448 | 0.275 | 9.475 | 10.025 | 6.99 | 240.67 | 254.65 | 448 |
| 449 | 0.275 | 9.975 | 10.525 | 6.99 | 253.37 | 267.35 | 449 |
| 450 | 0.275 | 10.475 | 11.025 | 6.99 | 266.07 | 280.05 | 450 |
| 451 | 0.275 | 10.975 | 11.525 | 6.99 | 278.77 | 292.75 | 451 |

O-Ring S1000 Common Metric Sizes

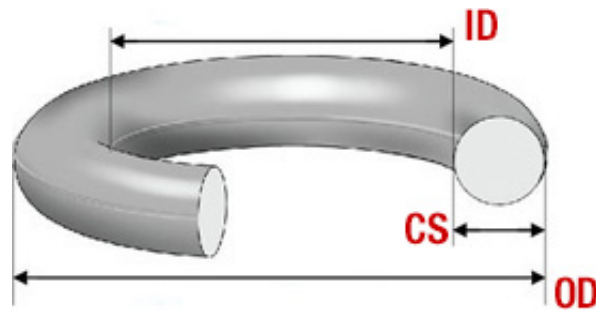

| Size: AS568 | C.S. Inch | I.D. Inch | O.D. Inch | C.S. MM | I.D. MM | O.D. MM | Size: AS568 |
|-------------|-----------|-----------|-----------|---------|---------|---------|-------------|
| 452 | 0.275 | 11.475 | 12.025 | 6.99 | 291.47 | 305.45 | 452 |
| 453 | 0.275 | 11.975 | 12.525 | 6.99 | 304.17 | 318.15 | 453 |
| 454 | 0.275 | 12.475 | 13.025 | 6.99 | 316.87 | 330.85 | 454 |
| 455 | 0.275 | 12.975 | 13.525 | 6.99 | 329.57 | 343.55 | 455 |
| 456 | 0.275 | 13.457 | 14.007 | 6.99 | 342.27 | 356.25 | 456 |
| 457 | 0.275 | 13.975 | 14.525 | 6.99 | 354.97 | 368.95 | 457 |
| 458 | 0.275 | 14.475 | 15.025 | 6.99 | 367.67 | 381.65 | 458 |
| 459 | 0.275 | 14.975 | 15.525 | 6.99 | 380.37 | 394.35 | 459 |
| 460 | 0.275 | 15.475 | 16.025 | 6.99 | 393.07 | 407.05 | 460 |
| 461 | 0.275 | 15.955 | 16.505 | 6.99 | 405.26 | 419.24 | 461 |
| 462 | 0.275 | 16.455 | 17.005 | 6.99 | 417.96 | 431.94 | 462 |
| 463 | 0.275 | 16.955 | 17.505 | 6.99 | 430.66 | 444.64 | 463 |
| 464 | 0.275 | 17.455 | 18.005 | 6.99 | 443.36 | 457.34 | 464 |
| 465 | 0.275 | 17.955 | 18.505 | 6.99 | 456.06 | 470.04 | 465 |
| 466 | 0.275 | 18.455 | 19.005 | 6.99 | 468.76 | 482.74 | 466 |
| 467 | 0.275 | 18.955 | 19.505 | 6.99 | 481.46 | 495.44 | 467 |
| 468 | 0.275 | 19.455 | 20.005 | 6.99 | 494.16 | 508.14 | 468 |
| 469 | 0.275 | 19.955 | 20.505 | 6.99 | 506.86 | 520.84 | 469 |
| 470 | 0.275 | 20.955 | 21.505 | 6.99 | 532.26 | 546.24 | 470 |
| 471 | 0.275 | 21.955 | 22.505 | 6.99 | 557.66 | 571.64 | 471 |
| 472 | 0.275 | 22.940 | 23.490 | 6.99 | 582.68 | 596.66 | 472 |
| 473 | 0.275 | 23.940 | 24.490 | 6.99 | 608.08 | 622.06 | 473 |
| 474 | 0.275 | 24.940 | 25.490 | 6.99 | 633.48 | 647.46 | 474 |
| 475 | 0.275 | 25.940 | 26.490 | 6.99 | 658.88 | 672.86 | 475 |
| 901 | 0.056 | 0.185 | 0.297 | 1.42 | 4.70 | 7.54 | 901 |

O-Ring S1000 Common Metric Sizes

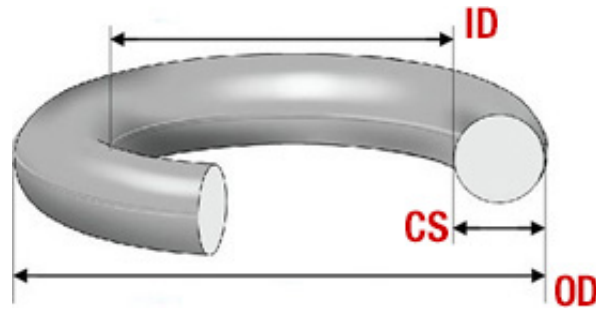

| Size: AS568 | C.S. Inch | I.D. Inch | O.D. Inch | C.S. MM | I.D. MM | O.D. MM | Size: AS568 |
|-------------|-----------|-----------|-----------|---------|---------|---------|-------------|
| 902 | 0.064 | 0.239 | 0.367 | 1.63 | 6.07 | 9.33 | 902 |
| 903 | 0.064 | 0.301 | 0.429 | 1.63 | 7.65 | 10.91 | 903 |
| 904 | 0.072 | 0.351 | 0.495 | 1.83 | 8.92 | 12.58 | 904 |
| 905 | 0.072 | 0.414 | 0.558 | 1.83 | 10.52 | 14.18 | 905 |
| 906 | 0.078 | 0.468 | 0.624 | 1.98 | 11.89 | 15.85 | 906 |
| 907 | 0.082 | 0.530 | 0.694 | 2.08 | 13.46 | 17.62 | 907 |
| 908 | 0.087 | 0.644 | 0.818 | 2.21 | 16.36 | 20.78 | 908 |
| 909 | 0.097 | 0.706 | 0.900 | 2.46 | 17.93 | 22.85 | 909 |
| 910 | 0.097 | 0.755 | 0.949 | 2.46 | 19.18 | 24.10 | 910 |
| 911 | 0.116 | 0.863 | 1.095 | 2.95 | 21.92 | 27.82 | 911 |
| 912 | 0.116 | 0.924 | 1.156 | 2.95 | 23.47 | 29.37 | 912 |
| 913 | 0.116 | 0.986 | 1.218 | 2.95 | 25.04 | 30.94 | 913 |
| 914 | 0.116 | 1.047 | 1.279 | 2.95 | 26.59 | 32.49 | 914 |
| 916 | 0.116 | 1.171 | 1.403 | 2.95 | 29.74 | 35.64 | 916 |
| 918 | 0.116 | 1.355 | 1.587 | 2.95 | 34.42 | 40.32 | 918 |
| 920 | 0.116 | 1.475 | 1.707 | 3.00 | 37.47 | 43.47 | 920 |
| 924 | 0.116 | 1.720 | 1.952 | 3.00 | 43.69 | 49.69 | 924 |
| 928 | 0.116 | 2.090 | 2.322 | 3.00 | 53.09 | 59.09 | 928 |
| 932 | 0.116 | 2.337 | 2.569 | 3.00 | 59.36 | 65.36 | 932 |